



LONG life
high end
ergonomic
SAVING MONEY
high IMPACT
Energy
created for you
**born to be
wild**
economic

BBG 


BBG Pick hammers



LA IN LA K



Select the product you need from our extensive range:

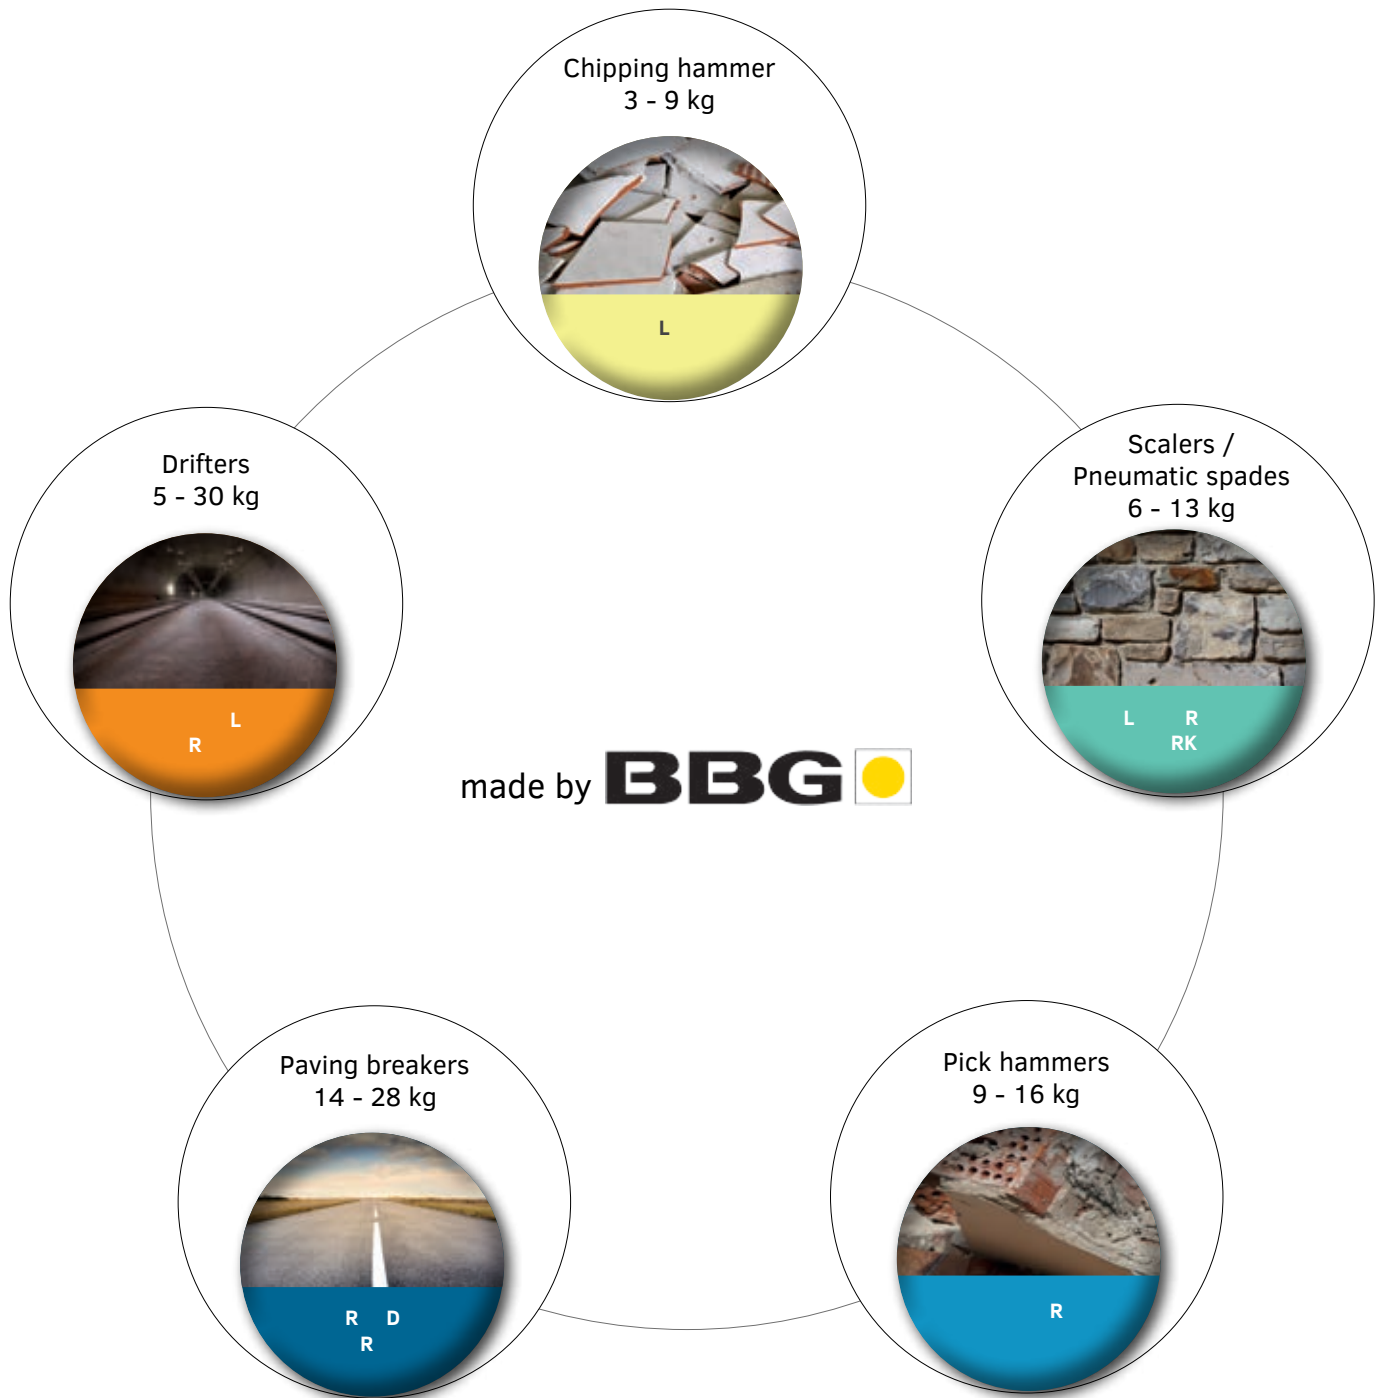


Moderate dismantling work on stonework and concrete

R D

Loosening during excavation work
Demolition work in mining

Legend

- F D-handle
- H Retainer cap
- K Open retainer cap
- R Latch retainer cap
- V Vibration reduced




BA9

Denomination	an i e	a t o	
BA9	R25 x 75	4-000-000-04932	9,5
BA9	S22 x 82,5	4-000-000-04933	9,5
BA9	S22 x 82,5	4-000-000-04934	9,6
BA9 R	S22 x 82,5	4-000-000-04935	10,0

vibration reduced			
BA9 V	R25 x 75	4-000-000-04964	11,0
BA9 V	S22 x 82,5	4-000-000-04965	11,0
BA9 V	S22 x 82,5	4-000-000-04966	11,2

9,5 - 11,2
kg



BA11

Denomination	an i e	a t o	
BA11	R25 x 75	4-000-000-04936	11,6
BA11	S22 x 82,5	4-000-000-04937	12,0
BA11	S26 x 108	4-000-000-04938	12,4
BA11 R	S22 x 82,5	4-000-000-04939	14,0
BA11 R	S26 x 108	4-000-000-04940	14,3

vibration reduced			
BA11 V	R25 x 75	4-000-000-04967	13,2
BA11 V	S22 x 82,5	4-000-000-04968	13,6
BA11 V	S26 x 108	4-000-000-04969	13,6

11,6 - 14,3
kg

BA13



Denomina tion	an ie	a t o	
BA13	R25 x 75	4-000-000-04941	12,9
BA13	S22 x 82,5	4-000-000-04942	13,3
BA13	S26 x 108	4-000-000-04943	13,7
BA13 R	S22 x 82,5	4-000-000-04944	15,3
BA13 R	S26 x 108	4-000-000-04945	15,6

12,9 - 15,6
kg

BL13



Denomina tion	an ie	a t o	
BL13	R25 x 75	4-000-000-04946	13,4
BL13	R25 x 75	4-000-000-04947	13,9
BL13	S22 x 82,5	4-000-000-04948	13,9
BL13	S22 x 82,5	4-000-000-04949	14,3
BL13 R	R25 x 75	4-000-000-04950	16,3
BL13 R	S22 x 82,5	4-000-000-04951	16,3

13,4 - 16,3
kg



MAKE AN IMPACT.

Moderate dismantling work on
stonework and concrete
Loosening during excavation work
Demolition work in mining

A FEAST FOR THE EYES.

It fits your hand just right.
And has curves in all the right places.
Your very own Lady in Black.

STAY IN LINE.

Our hammers are always
kept up-to-date, which means
they comply with the provisions
of the applicable Machinery Directive.

BBG = QUALITY.

Does quality matter to you?
It does to us too. That is why
we are ISO 9001-certified.



ergonomically designed handles

trigger protection

low air consumption

forged + galvanized

silenced

high quality steel

high output

Made in AUSTRIA


i amme B

SHANK SIZES

R25 x 75










S22 x 82



24 hours

Your delivery capability is important to us too, which is why we ensure that the parts you have ordered leave our warehouses within 24 hours!



Denomination		B	B	B	B	B	B	B
		FH	FK	FR	FH	FK	FH	FK
Weight	kg	9,5	9,6	10,0	9,5	9,6	11,0	11,2
Silencer		•	•	•	•	•	•	•
D-handle		•	•	•	•	•	•	•
T-handle		-	-	-	-	-	-	-
Trigger protection		•	•	•	•	•	•	•
Vibration reduced		-	-	-	-	-	•	•
Vibration value	m/s ²	9,9	9,9	9,9	9,9	9,9	6,4	6,4
Noise level	dB(A)	102	105	105	102	105	102	105
Length	mm	478	478	478	478	478	503	523
Piston diameter	mm	33	33	33	33	33	33	33
Piston stroke	mm	130	130	130	130	130	130	130
Impact frequency	1/s	26,6	26,6	26,6	26,6	26,6	26,6	26,6
Air consumption	l/s	10,6	10,6	10,6	10,6	10,6	12,5	12,5
Operation pressure	bar	6	6	6	6	6	6	6
Impact energy	J	34	34	34	34	34	34	34
Connection thread		G3/4"-	G3/4"	G3/4"	G3/4"	G3/4"	G3/4"	G3/4"
Shank size		R25 x 75, S22 x 82,5	S22 x 82	S22 x 82	R25 x 75, S22 x 82,5	S22 x 82	R25 x 75, S22 x 82,5	S22 x 82,5
Retainer system		retainer cap	open retainer cap	latch retainer cap	retainer cap	open retainer cap	retainer cap	open retainer cap
Suitable lubricator		S016, S016 M OR40	S016, S016 M OR40	S016, S016 M OR 40	S016, S016 M OR40	S016, S016 M OR40	S016, S016 M OR40	S016, S016 M OR40
								

Easy on **R R D R L**

On a daily basis, the operator of an air hammer on a construction site is subject to vibrations.



Ho anteeiatiee

The upper air buffer decelerates the piston on the return stroke, preventing impact on the handle. In the lower buffer area, the idle impact energy is reduced which then substantially preserves the cylinder.

**ea anta eto o
t ea onte eato o te amme
an onte amme ite**









i amme B 11

Vibration reduction

We want our customers to want to work with our pressurized air equipment. That is why we offer them our vibration reduced hammers.




more efficient and to

Denomination		B 11 FH	B 11 FK	B 11 FR	B 11 FH	B 11 FH	B 11 FK
Weight	kg	11,6	12,0 -12,4	14,0 - 14,3	12,0	13,2	13,6
Silencer		•	•	•	•	•	•
D-handle		•	•	•	•	•	•
T-handle		-	-	-			
Trigger protection		•	•	•	•	•	•
Vibration reduced		-	-	-	-	•	•
Vibration value	m/s ²	9,1	9,1	9,1	9,1	7,5	7,5
Noise level	dB(A)	104	105	103	104	105	105
Length	mm	520	540, 560	525, 555	520	570	570
Piston diameter	mm	36	36	36	36	36	36
Piston stroke	mm	135	135	135	135	135	135
Impact frequency	1/s	24,2	24,2	24,2	26,0	24,2	24,2
Air consumption	l/s	10,7	10,7	10,7	15,8	12,7	12,7
Operation pressure	bar	6	6	6	6	6	6
Impact energy	J	40	40	40	40	40	40
Connection thread		G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"	G 3/4"
Shank size		R25 x 75	S22 x 82,5 S26 x 108	S22 x 82,5 S26 x 108	R25 x 75	R25 x 75	S22 x 82,5 S26 x 108
Retainer system		retainer cap	open retainer cap	latch retainer cap	retainer cap	retainer cap	open retainer cap
Suitable lubricator		SO16, SO16 M OR40	SO16, SO16 M OR40	SO16, SO16 M OR40	SO16, SO16 M OR40	SO16, SO16 M OR40	SO16, SO16 M OR40
							



STORAGE COSTS?
Minimal!

Our modular system has enabled us to create *one* chipping tool sleeve for *several* different types of hammers!

SHANK SIZES		
R25 x 75	S22 x 82,5	S26 x 108
		

i amme B 13

SHANK SIZES

R25 x 75



S22 x 82,5



S26 x 108







FULL D ahead

The pneumatic tools division was originally a part of the Gebrüder Böhler & Co. AG Company, located in Sollenau, Lower Austria.

The production moved to Kapfenberg, Styria in the year 1933. In 1950 it was relocated to Kapfenberg-Deuchendorf (see illus. left), where the company BBG Baugeräte produced pneumatic hammers for 66 years.

BBG has been in production in the newly-built company facilities at the High-Tech-Park West in Kapfenberg since 2016.




Denomination		B 13 FH	B 13 FK	B 13 FR	B 13 FH
Weight	kg	12,9	13,3 - 13,7	15,3 - 15,6	12,9
Silencer		•	•	•	•
D-handle		•	•	•	•
T-handle		-	-	-	-
Trigger protection		•	•	•	•
Vibration reduced		-	-	-	-
Vibration value	m/s ²	14,9	14,9	14,9	14,9
Noise level	dB(A)	103	104	103	105
Length	mm	600	610, 640	600, 630	600
Piston diameter	mm	36	36	36	36
Piston stroke	mm	180	180	180	180
Impact frequency	1/s	17,9	17,9	17,9	17,9
Air consumption	l/s	10,8	10,8	10,8	10,8
Operation pressure	bar	6	6	6	6
Impact energy	J	50	50	50	50
Connection thread		G 3/4"	G 3/4"	G 3/4"	G 3/4"
Shank size		R25 x 75	S22 x 82,5 S26 x 108	S22 x 82,5 S26 x 108	R25 x 75
Retainer system		retainer cap	open retainer cap	latch retainer cap	retainer cap
Suitable lubricator		SO16, SO16 M, OR 40	SO16, SO16 M, OR40	SO16, SO16 M, OR 40	SO16, SO16 M, OR 40
					

R L F R F R R D

unbeatable

Thinking in the long term means our hammers are working in the long term as well. High quality materials are what make our hammers stand out; our goal is to maximize durability and resilience.

a it to a ta i etime

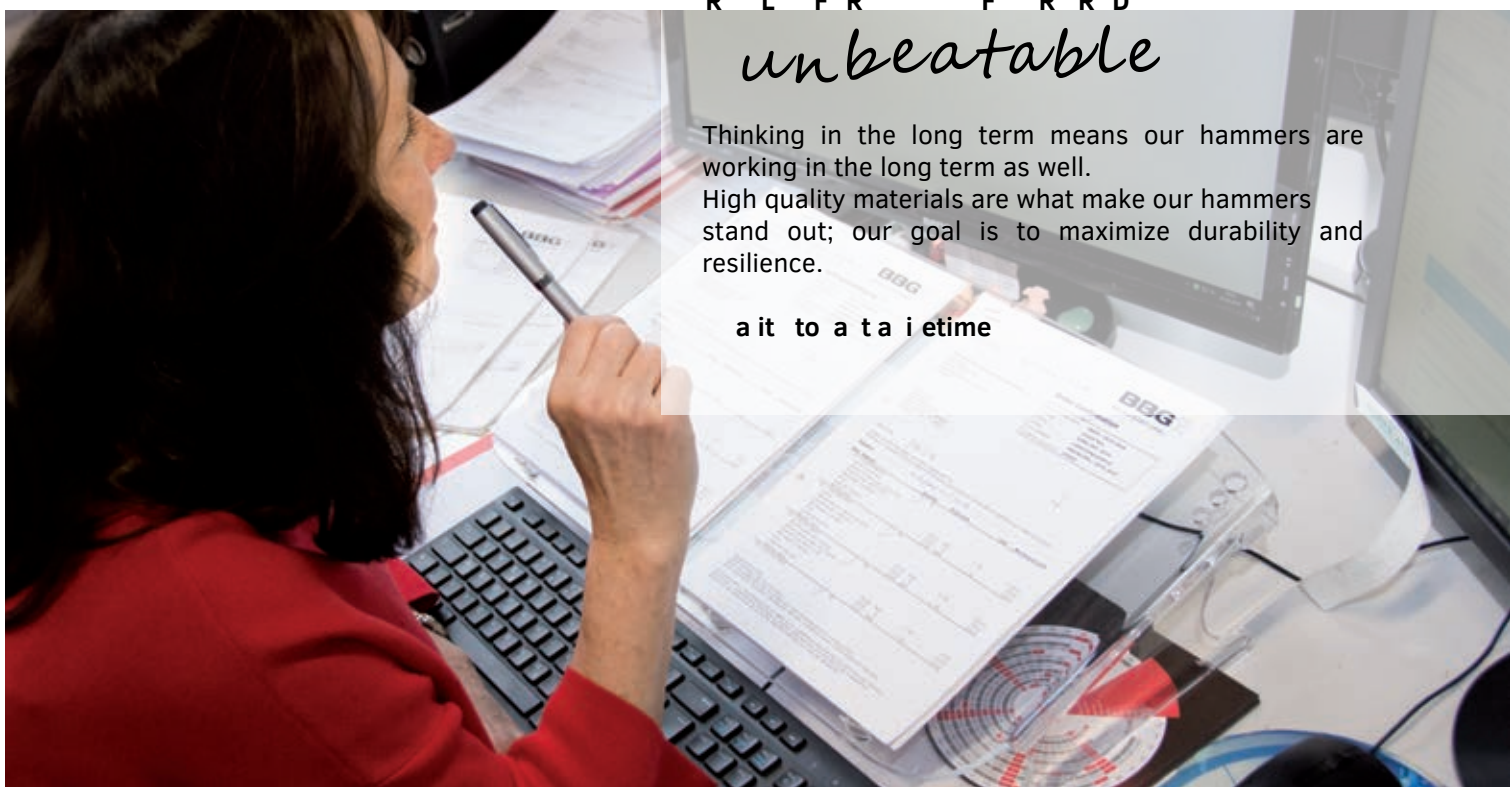

i amme BL13








SHANK SIZES

R25 x 75



S22 x 82



Denomination		BL13 F	BL13 FH	BL13 FK	BL13 FR
Weight	kg	13,4	13,9	14,3	16,3
Silencer		•	•	•	•
D-handle		•	•	•	•
T-handle		-	-	-	-
Trigger protection		•	•	•	•
Vibration reduced		-	-	-	-
Vibration value	m/s ²	10	10	10	10
Noise level	dB(A)	105	105	105	105
Length	mm	610	640	660	650
Piston diameter	mm	36	36	36	36
Piston stroke	mm	205	205	205	205
Impact frequency	1/s	14,3	14,3	14,3	14,3
Air consumption	l/s	11,5	11,5	11,5	11,5
Operation pressure	bar	6	6	6	6
Impact energy	J	61	61	61	61
Connection thread		G3/4"	G3/4"	G3/4"	G3/4"
Shank size		R25 x 75	R25 x 75 S22 x 82,5	S22 x 82,5	R25 x 75 S22 x 82,5
Retainer system		retainer ring	retainer cap	retainer cap	open retainer cap
Suitable lubricator		SO16, SO16 M, OR40	SO16, SO16 M, OR 40	SO16, SO16 M, OR40	SO16, SO16 M, OR40
					

Flexible D FF

A good hammer uses less energy – the amount of air supplied is low.

How were we able to optimize the air supply to the hammer?

The pistons on all of the BBG hammers are precisely fitted to the shank! The majority of the energy supplied is then transformed into power of impact.

The result is higher efficiency!

THE SAME POWER -
LESS VIBRATION

Health is our most
precious asset!
That's why BBG offers
vibration reduced models
that go easy on the
operator.

L i a t o 1 1 R

SAFE &
CLEAN

The lubricator legs
ensures a stable
foundation and
protects from
contamination!

Thanks to the automated operational
pressure reduction with S016 M excessive
strain of the hammer is no longer possible
and work can always be done with the perfect
degree of efficiency.

S016
S016 M

Denomination

		1	1	R
Item no.		4-000-000-03542	4-000-000-03541	2-000-000-00579
Weight	kg	9,5	10,8	10,0
Length	mm	370	440	
Oil capacity	lt	1,4	1,4	4,0
Max. operating pressure	bar	9,0	9,0	10,0
Reducing valve, adjustable		-	•	-
Lubricator legs		1-000-000-84728	1-000-000-84728	-
Automatic power-off		•	•	-

Smooth^R

A hammer works at its best if it is constantly lubricated.

at en e on tant amme i ation

The innovative line lubricators S016 and S016 M from BBG are permanent lubricators that guarantee constant hammer lubrication.

Thanks to an adjustable oil flow, these exceptional lubricators adapt to every weight class of hammers there is. The robust design guarantees an especially long service life!

AUTOMATIC POWER-OFF

... prevents dry operation of the hammers when the lubricator is empty, and avoids the dreaded whiplash effect.

OR40






BBG 
Team

At your service.
All over the world.



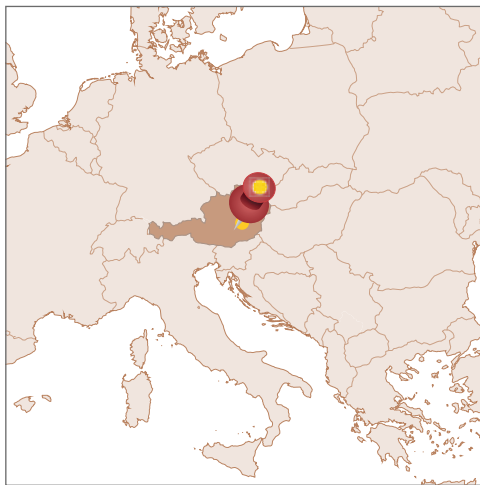

o o ate Hea a te
Ka en e t ia
BBG Baugeräte GmbH

Questions?
t i e a a



Ing. Johann Pfeffer
Engineer

Sales International
j.pfeffer@bbg-gmbh.at

3

1 3 1

Udo Rademacher
Graduate of Economics

Sales Germany
u.rademacher@bbg-gmbh.at

1 3

Have you heard about our
R R R



**NO MORE
UNINTENTIONAL
STARTS!**

BBG 



BB Ba e t e m H
High-Tech-Park West 6 • A-8605 Kapfenberg
office@bbg-gmbh.at • www.bbg-gmbh.at
☎ +43 (0) 3862 / 304 - 0
☎ +43 (0) 3862 / 304 - 910

ARAG Bau AG

ARAG Bau AG, Zinggen, 6166 Hasle LU, Schweiz

Jan Fehlmann

eMail : jan.fehlmann@arag-group.ch

Mobil : +41 76 487 28 54