

Clamshell bucket with two vertical cylinders, suitable for loading and digging

- Geometry of the 2 powerful cylinders grants huge penetration force.
- Robust construction makes it suitable for the most demanding applications.
- Suggested for excavator up to 32 Ton.
- Buckets made of HB 400 wear-resistant steel.
- Teeth available on demand.

BMV-2/1300-P






BMV-2/500-P



Model	Cap. l.	Weight Kg	Max load daN	Max BAR	A mm	B mm	C mm	D mm	E mm
BMV - 2/300-P	300	480	3000	300	1620	1480	1780	1280	500
BMV - 2/350-P	350	510	3000	300	1620	1480	1780	1280	600
BMV - 2/400-P	400	540	3000	300	1620	1480	1780	1280	700
BMV - 2/450-P	460	580	3000	300	1620	1480	1780	1280	800
BMV - 2/500-P	520	610	3000	300	1620	1480	1780	1280	900
BMV - 2/1000-P*	1050	1500	5000	300	2400	1950	2000	1400	1000
BMV - 2/1300-P*	1350	1700	5000	300	2400	1950	2000	1400	1300
BMV - 2/1500-P*	1600	1900	5000	300	2400	1950	2000	1400	1500

* Cylinders with hydraulic cushioning

Technical Data

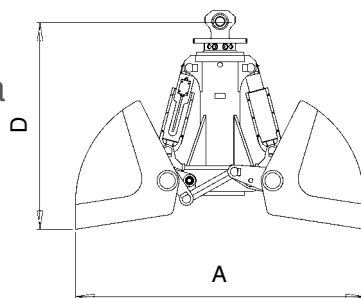

Accessories

Fixed head	Bolt-on head (without rotation)
GRM 10 T/F	Mechanical, free 250° rotation (without hydraulic supply)
GRI 10 T/P	Hydraulic rotator up to 500 lt.
GRI 20 T/P	Hydraulic rotator for 1000 lt. and over
Teeth	Digging teeth, bolted
Extension	Extensions up to 3 metres of length
Top link for excavator	Cardan suspension link for excavator

printed by: www.arag-bau.ch