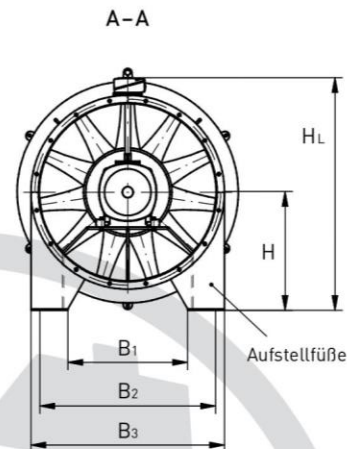
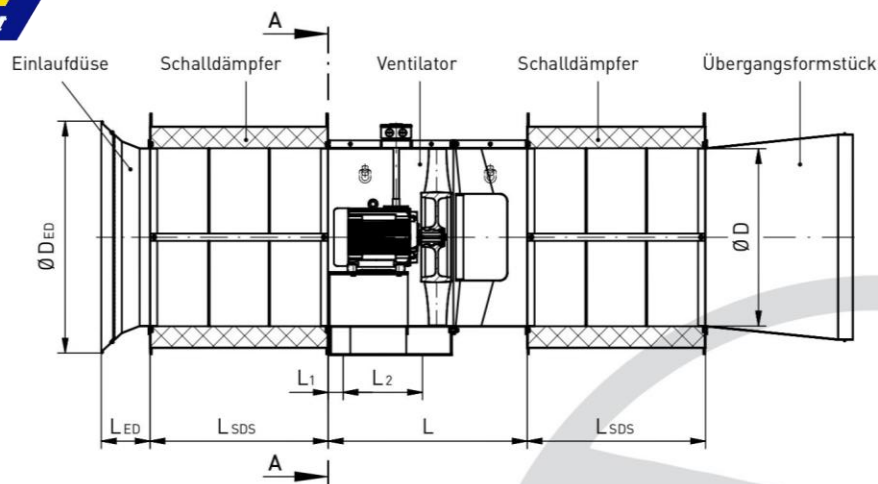


Typ	Lager-Nr.	Ø D mm	Länge L mm	Höhe HL mm	Höhe H mm	Leistung kW	Gewicht kg	Anschlussflansch			Maße Aufstellfüße				
								Ø D ₁ mm	X mm	Ø D ₃ mm	L ₁ mm	L ₂ mm	B ₁ mm	B ₂ mm	B ₃ mm
AL 7 – 30	05729081	700	650	810	600	3.0	150	760	12	20	35	580	–	400	790
AL 8 – 55	05800998	800	700	1060	600	5.5	195	860	12	20	35	580	–	400	790
AL 8 – 75	05089063	800	900	1120	600	7.5	280	860	12	20	50	800	–	650	790
AL 8 – 110	05089064	800	900	1130	600	11.0	310	860	12	20	50	800	–	650	790
AL 8 – 150	05089095	800	900	990	600	15.0	330	860	12	20	50	800	–	650	790
AL 10 – 300	05109068	1000	1500	1350	700	30.0	650	1060	16	20	115	670	800	1010	1100
AL 12 – 450	05129234	1200	1350	1575	800	45.0	1000	1260	16	20	100	540	813	1193	1313
AL 12 – 550	05129171	1200	1350	1570	800	55.0	1100	1260	16	20	150	550	813	1193	1313
AL 12 – 750	05129205	1200	1550	1610	800	75.0	1360	1260	16	20	150	750	813	1193	1313
AL 14 – 900	05149131	1400	1700	1860	950	90.0	1725	1480	24	20	125	900	926	1300	1526
AL 14 – 1100	05149119	1400	1700	1860	950	110.0	1875	1480	24	20	125	900	926	1300	1526
AL 16 – 900	05169091	1600	2000	2060	1050	90.0	2250	1696	24	20	125	1000	936	1550	1736
AL 16 – 1100	05169066	1600	2000	2060	1050	110.0	2350	1696	24	20	125	1000	1046	1550	1746
AL 16 – 1320	05169092	1600	1900	2060	1050	132.0	2450	1696	24	20	125	1000	1046	1550	1746
AL 16 – 1600	05169070	1600	2000	2060	1050	160.0	2650	1696	24	20	125	1000	1046	1550	1746
AL 17 – 1600	05170954	1700	2100	2110	1050	160.0	2800	1775	24	20	150	1050	1136	1650	1836
AL 17 – 2000	05170953	1700	2100	2130	1050	200.0	3000	1775	24	20	150	1050	1136	1650	1836
AL 17 – 2500	05170956	1700	2200	2130	1050	250.0	3400	1775	24	20	150	1150	1136	1650	1836

Angaben KORFMANN-Standardbaureihe (unverbindlich)

Polumschaltbare Motoren bzw. einzelverstellbare Flügelräder auf Anfrage